

Real-time TPC Analysis with the ALICE High-Level Trigger

V. Lindenstruth^a, C. Loizides^{bc*}, D. Röhrich^c, B. Skaali^d, T. Steinbeck^a,
R. Stock^b, H. Tilsner^a, K. Ullaland^c, A. Vestbø^c and T. Vik^d
for the ALICE Collaboration

^aKirchhoff Institut für Physik, Im Neuenheimer Feld 227, D-69120 Heidelberg, Germany

^bInstitut für Kernphysik Frankfurt, August-Euler-Str. 6, D-60486 Frankfurt am Main, Germany

^cDepartment of Physics, University of Bergen, Allegaten 55, N-5007 Bergen, Norway

^dDepartment of Physics, University of Oslo, P.O.Box 1048 Blindern, N-0316 Oslo, Norway

The ALICE High-Level Trigger processes data online, to either select interesting (sub-) events, or to compress data efficiently by modeling techniques. Focusing on the main data source, the Time Projection Chamber, the architecture of the system and the current state of the tracking and compression methods are outlined.

1. Introduction

The ALICE experiment described in [1,2,3] will investigate Pb–Pb collisions at a center of mass energy of about 5.5 TeV per nucleon pair and pp collisions at 14 TeV. Its detectors are optimized for heavy-ion reactions at an anticipated charged particle multiplicity of up to $dN_{\text{ch}}/d\eta$ of 8000 in the central region [4].

The main central tracking detector, the Time Projection Chamber (TPC), is read out by about 600 000 channels, producing at most a data size of 75 MB per event for central Pb–Pb under extreme assumption and of 2.5 MB for pp collisions. The estimated value of the maximum gate frequency is about 200-1000 Hz depending on event multiplicity [5].

The overall event rate is limited by the Data Acquisition (DAQ) bandwidth to the permanent storage system of 1.25 GB/s. Without further reduction or compression the ALICE TPC can only take central Pb–Pb events at up to 20 Hz. Significantly higher rates are possible by either selecting interesting (sub-) events, or compressing data efficiently by modeling techniques; both requiring real-time analysis of the detector information with a latency of the order of a few ms.

To accomplish the pattern recognition tasks at an incoming data rate of 10-25 GB/s, a massive parallel computing system, the High-Level Trigger (HLT) system, is being designed [6].

The key requirement for the HLT system is the ability to perform the event analysis in real-time. Based on the extracted information, charge clusters and tracks, data reduction can be performed in different ways:

- **Trigger:** Generation and application of a software trigger capable of selecting interesting events from the input data stream.
- **Select:** Reduction in the size of the event data by selecting (sub-) events and/or region of interest (RoI).
- **Compression:** Reduction in the size of the event data by compression techniques.

As such the HLT system will enable the ALICE TPC detector to operate at a rate up to a few hundred Hz for heavy-ion and up to 1 kHz for pp collisions.

2. Data Flow and HLT Architecture

Figure 1 shows a sketch of the architecture of the system adapted to the anticipated data flow

*Author's email: loizides@ikf.uni-frankfurt.de

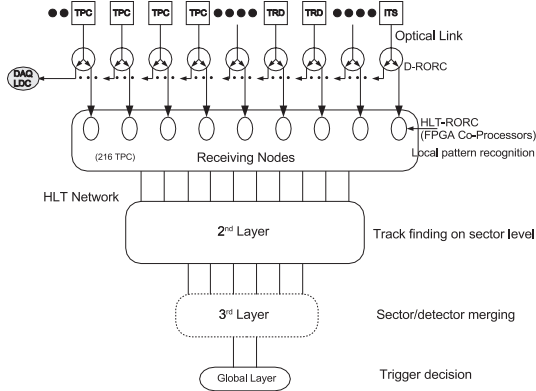


Figure 1. Data-flow architecture of the HLT system. The detector raw data is duplicated and received by the DAQ and HLT system.

from the ALICE detectors, focusing on the TPC. The TPC consists of 36 sectors, each sector being divided into 6 sub-sectors. For each sub-sector the data is transferred via an optical fiber from the detector front-end into DAQ Read-Out Receiver Cards (D-RORC). From there a copy of the data is sent into HLT Read-Out Receiver Cards (HLT-RORC) interfaced to the receiving nodes through the internal PCI bus. In addition to different communication interfaces, the HLT-RORC provides a FPGA co-processor for the data intensive local tasks of the pattern recognition and enough external memory to store several dozen event fractions. The receiver nodes perform the local pre-processing task, cluster and track seeding on the sub-sector level using the FPGA co-processor. The next two levels of computing nodes exploit the local neighborhood: track segment reconstruction on sector level. Finally all local results are collected from the other sectors (or in principle from the other ALICE sub-detectors) and combined on a global level: track segment merging and final track fitting.

The computing farm is designed to be completely fault tolerant avoiding single points of failure, except for the unique detector links. A generic communication framework has been de-

veloped based on the publisher-subscriber principle, which one allows to construct any hierarchy of communication processing elements [7,8].

3. Online Pattern Recognition

In general, the HLT system has to reconstruct the complete event information online. Concerning the TPC and the other tracking devices, the particles ideally follow helical trajectories due to the solenoidal magnetic field of the L3 magnet surrounding these central detectors.

For HLT tracking, we distinguish two different approaches: the “sequential feature extraction” and the “iterative feature extraction” [9,10].

The sequential method approximates the cluster centroids using a fast “Cluster Finder”. The centroids are used as input for the “Track Follower” to determine the corresponding track parameters. This approach is applicable for lower occupancy like pp and low multiplicity Pb–Pb collisions. However, at larger multiplicities expected for Pb–Pb at LHC, clusters start to overlap and deconvolution becomes necessary in order to achieve the desired tracking efficiencies.

Whereas, the iterative approach first estimates potential tracks using a “Track Candidate Finder”, which are then fed to a “Cluster Fitter” to assign clusters to the tracks thereby deconvoluting overlapping clusters shared by different tracks candidates. In both cases, a final helix fit on the assigned clusters determines the track parameters.

In order to reduce data shipping and communication overhead within the HLT, as much as possible of the *local* pattern recognition will be done using the FPGA co-processor [11].

3.1. Sequential Tracking Approach

The HLT tracking scheme for low multiplicity events has been adapted from the STAR L3 trigger [12]. The cluster finder estimates cluster centroids by the weighted mean in pad-and-time direction. Overlapping clusters are split at local minima. The list of space points is then handed to the track follower, which at first forms neighboring clusters into segments and then merges segments into tracks. The tracking performance has

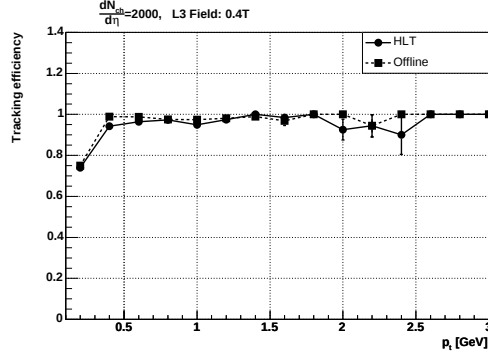


Figure 2. Tracking efficiency for $dN_{\text{ch}}/d\eta = 2000$ and a magnetic field strength of 0.4 T as a function of p_t compared for online (HLT) sequential and offline tracking scheme.

been extensively studied and compared with the offline TPC reconstruction chain [6,9,10]. It turns out, that the method is well suited and within the anticipated time budget for charged particle multiplicities of up to $dN_{\text{ch}}/d\eta = 2000$.

Concentrating on $dN_{\text{ch}}/d\eta = 2000$ and a magnetic field of 0.4 T, Fig. 2 shows a comparison of the tracking efficiency as a function of p_t for the HLT and offline tracking schemes. In both cases, the efficiency drops for low momentum tracks ($p_t < 0.5$ GeV) due to the crossing of sector boundaries. The integral efficiency is about 90% and the fake track rate of the order of 1.5%. Fig. 3 displays the momentum resolution as a function of p_t for the same setup. On average, the HLT cluster finder takes about 15 ms, the tracker about 750 ms.

3.2. Iterative Tracking Approach

The simple sequential method may be applicable to $dN_{\text{ch}}/d\eta = 4000$, but ALICE is preparing for even higher multiplicities of up to $dN_{\text{ch}}/d\eta = 8000$. In that case, the occupancy in the TPC is of the order of 25% and deconvolution becomes mandatory in order to achieve the desired tracking efficiencies. The cluster shape is dependent on the track parameters, and in particular on the crossing angles of tracks between the padrow

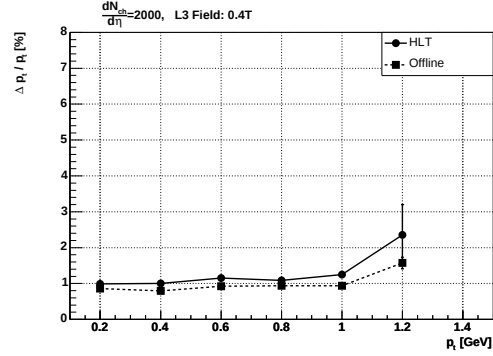


Figure 3. Relative transverse momentum resolution for $dN_{\text{ch}}/d\eta = 2000$ and a magnetic field strength of 0.4 T as a function of p_t compared for online (HLT) sequential and offline tracking scheme.

and drift time. In order to properly deconvolute the overlapping clusters, knowledge of the track parameters that have produced the clusters is needed. Once track candidates are given, the clusters can be fit to their known shape, and the cluster centroid can be correctly reconstructed. If the fit fails, the track candidate will be disregarded.

Hough Transform

The Hough Transform (HT) method could be suitable to estimate track candidates, as it can be applied directly on the raw ADC data. In its original form [13] the HT determines a curve in parameter space for a signal corresponding to all possible tracks with a given parametric form to which it could possibly belong. The space is then discretized and entries are stored in a histogram. For all entries exceeding a given threshold in the histogram the corresponding parameters are found.

For simplification of the transformation the detector is divided into subvolumes in pseudorapidity. In addition, restricting the analysis to tracks originating from the vertex, a track in the η -volume is characterized by two parameters: the emission angle with the beam axis ψ and the

curvature κ . The transformation is performed from (R, ϕ) -space to (ψ, κ) -space using the following equations:

$$\begin{aligned} R &= \sqrt{x^2 + y^2} \\ \phi &= \arctan\left(\frac{y}{x}\right) \\ \kappa &= \frac{2}{R} \sin(\phi - \psi). \end{aligned}$$

The integral efficiency for “good” track candidates is above 90% for a full multiplicity event and a magnetic field of 0.2 T. This was estimated [9] by dividing the number of verified track candidates divided with the number of findable tracks estimated by the offline analysis. The list of verified track candidates was obtained by laying out a road in the raw data corresponding to the track parameters of the peak. If enough clusters were found along the road, the track candidate was considered a track, if not the track candidate was disregarded. However, depending on certain threshold parameters, the number of fake track candidates coming from spurious peaks in the parameter space is above 200%. That problem of the HT method has to be overcome in order to determine valuable track candidates as input for the cluster fitting and deconvoluting procedure.

Cluster Fitter

The cluster fitting method were initially implemented for TPC data in the NA49 experiment. The Cluster Fitter (CF) fits a two-dimensional Gauss function with 5 parameters to the charge clusters:

- the position in pad and time direction;
- the widths in pad and time;
- the amplitude of the distribution.

The initial values of the fit parameters are provided by the track parameters. The position in pad and time direction is obtained by calculating the crossing point between the tracks and the two-dimensional padrow plane. The widths are obtained from the parameterisation of the cluster model as a function of the track parameters.

During the minimisation procedure of the least square error, the widths are held fixed at their input values, while the position in pad and time are free to vary.

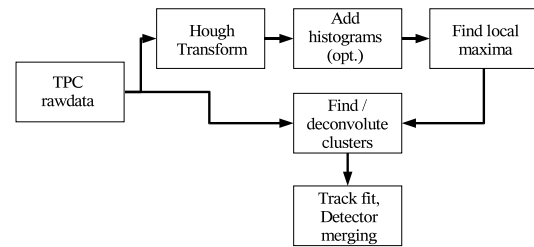


Figure 4. Flow diagram showing the pattern recognition scheme using the Hough Transform and the Cluster Deconvoluter/Fitter.

A flow diagram of the complete chain of HT and CF is shown in Fig. 4. The HT is done locally on the receiver nodes. The data volume therefore corresponds to 1/6 of a complete TPC sector. Optionally the respective histograms within a complete sector can be added in order to improve the signal/noise ratio of the peaks in the parameter space. A simple over-threshold local-maxima finder processes the histograms and identifies the peaks corresponding to track candidates. The list of track candidates is passed to the CF to deconvolute the clusters along the respective track roads. The obtained tracks and their assigned clusters are finally fitted to obtain their track parameters.

Figure 5 shows the efficiency obtained using the HT and cluster fitting approach for $dN_{\text{ch}}/d\eta = 4000$ and a magnetic field strength of 0.4 T as a function of p_t . For comparison, the results for the sequential cluster finder/track follower approach and the offline tracking scheme are added. The efficiency loss with respect to the standard tracking is significant. The reason is, that even for $p_t > 0.5 \text{ GeV}$ the HT produces a large number of fake track candidates from structured backgrounds in the parameter space (as mentioned

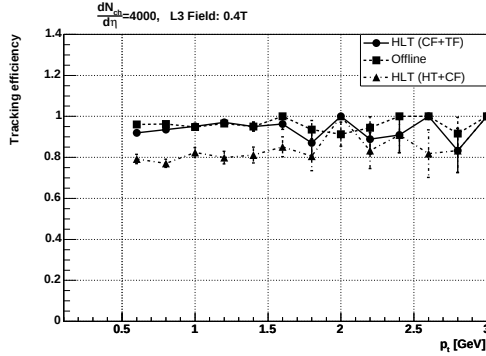


Figure 5. Tracking efficiency of the Hough Transform and Cluster Fitter (HT+CF) as a function of $p_t > 0.5$ GeV for $dN_{ch}/d\eta = 4000$ and a magnetic field strength of 0.4 T. For comparison, the efficiency of offline and the HLT sequential approach (CF+TF) is also shown.

above). These fake tracks are filtered out during the cluster fitting procedure by removing tracks, which do not point to valid clusters. However, their presence causes the cluster fitting procedure to become unstable, if too many fake tracks are pointing to the same cluster. As a result, the cluster fit may be rejected on the basis of χ^2 criteria, resulting in a failure to fit the cluster.

In order to ensure the principal function of the CF, offline tracks were feeded in the cluster fitting procedure representing optimal track candidates. Here, even at $dN_{ch}/d\eta = 8000$ and a magnetic field strength of 0.4 T, the cluster fitter was able to improve the relative p_t resolution by 10% and the azimuthal resolution by 15%, showing that the deconvolution/fitting procedure is working and even capable of improving the offline resolution.

4. Data modeling and Data compression

Besides triggering and selecting (parts of) events, one of the main tasks of the HLT system is to compress the event data efficiently with a minimal loss of physics information. In general, two schemes of data compression are considered:

- **Binary lossless data compression**, allowing bit-by-bit reconstruction of the original data set;
- **Binary lossy data compression**, not allowing bit-by-bit reconstruction of the original data, while however retaining all relevant physical information.

Most state of the art compression techniques were studied on real NA49 and simulated TPC data and presented in detail in [14]. All methods roughly result in compression factors close to 2.

However, the most effective data compression can be expected by cluster and track modeling [9,10]. Here, the input to the compression algorithm is a lists of tracks and their corresponding clusters. For every assigned cluster, the cluster centroid deviation from the track model is calculated in both pad and time direction. Its size is quantized with respect to the given detector resolution and represented by a fixed number of bits. The quantization steps have been set to 0.5 mm for the pad direction and 0.8 mm for the time direction, which is compatible with the intrinsic detector resolution. In addition the total charge of the cluster is stored. Since the cluster shape itself can be parameterised as a function of track parameters and detector specific parameters, the cluster widths in pad and time are not stored for every cluster. During the decompression step, the cluster centroids are restored, and the cluster shape is calculated based on the track parameters.

The compression scheme has been applied to a simulated Pb-Pb event with a multiplicity of $dN_{ch}/d\eta = 1000$. The input tracks used for the compression are tracks reconstructed with the sequential tracking approach. The clusters, which were not assigned to a track during the track finding step, were disregarded and not stored for further analysis. A relative size of 11% for the compressed data with respect to the original set is obtained, whereas having a 2% efficiency loss compared to the original data.

5. Conclusion

Focusing on the TPC, the HLT system is designed to increase the readout and storage of relevant physics events by a factor of 10. The sequential approach, cluster finding followed by track finding, is applicable for pp and low multiplicity Pb–Pb data up to $dN_{\text{ch}}/d\eta = 2000$ with more than 90% efficiency and might be extensible for higher particle densities. The timing results show that the desired rate of 1 kHz for pp and 200 Hz for Pb–Pb will be achievable. For multiplicities of $dN_{\text{ch}}/d\eta \geq 4000$, the iterative approach is foreseen using a track candidate finder followed by cluster deconvolution using the cluster fitter. Here, the Circle Hough Transform as a possible method to find track candidates seems to fail, as its high number of fake track candidates confuses the otherwise well working cluster fitter. So far, the problem to find a quantitative much better track candidate finder has not been solved.

By compressing the data using data modeling techniques, the results for low multiplicity events show that with a loss of tracking efficiency of about 2% a compression factor of up to 10% with respect to the original data sizes is achievable.

REFERENCES

1. ALICE Collaboration, Technical Proposal, CERN/LHCC/1995–71.
2. ALICE Collaboration, Technical Proposal, Addendum 1, CERN/LHCC/1996–32.
3. ALICE Collaboration, Technical Proposal, Addendum 2, CERN/LHCC/1999–13.
4. ALICE Collaboration, *Physics Performance Report*, Vol. I, CERN/LHCC/2003–049.
5. ALICE Collaboration, *Technical Design Report of the Time Projection Chamber*, CERN/LHCC/2000–001.
6. ALICE Collaboration, *Technical Design Report: Trigger, Data Acquisition, High-Level Trigger, Control System*, CERN/LHCC/2003–062.
7. V. Lindenstruth, M. Schulz, T. Steinbeck, *An Object-Oriented Network-Transparent Data Transportation Framework*, IEEE Trans. Nucl. Sci. **49** (2) 2002.
8. T. Steinbeck, *A Modular and Fault-Tolerant Data Transport Framework*, Ph.D. thesis, 2004, to be published.
9. C. Loizides *et. al.*, *Online Pattern Recognition for the ALICE High-Level Trigger*, submitted to IEEE Trans. Nucl. Sci. submitted to IEEE Trans. Nucl. Sci., arXiv:physics/0310052.
10. A. Vestbø, *Fast Pattern Recognition and Data Compression for the ALICE High-Level Trigger*, Ph.D. thesis, 2004, to be published.
11. G. Grastveit *et. al.*, *FPGA Co-processor for the ALICE High-Level Trigger*, Proc. CHEP03, La Jolla, Ca, USA, March 2003; arXiv:physics/0306017.
12. C. Adler, J. Berger, M. Demello, T. Dietel, D. Flierl, J. Landgraf *et. al.*, *The STAR Level-3 Trigger System*, Nucl. Instr. Meth. **A499** (2003) 778.
13. P. Hough, *Machine Analysis of Bubble Chamber Pictures*, International Conference on High Energy Accelerators and Instrumentation, CERN (1959).
14. J. Berger, U. Frankenfeld, V. Lindenstruth, P. Plamper, D. Röhrich, E. Schäfer *et. al.*, *TPC Data Compression*, Nucl. Instr. Meth. **A489** (2002) 406.